


GENERAL INFORMATION

- Industrial grade operators able to handle intensive duty.
- Control board has facility for safety photo electric cells, induction loops and accepts remote control and all access control inputs.
- Control board operates via 24v supply with battery backup feature available on GDS 24-220 and as standard on GDS 24-450.


TECHNICAL DETAILS

MODEL	GDS 24-220	GDS 24-450
Input Power	240v AC, 24v AC or DC	240v AC, 24v AC or DC
Gate Size Max.	400kg, 8m approx	400kg, 8m approx
Speed	220mm/sec fixed	450mm/sec (Ramp up/down feature)
Duty Cycle	100%	100%
Other Details	24v, 120w DC Industrial motor Cast Iron Gearbox Laser cut 6mm zinc plated steel chassis Inbuilt limit switch	24v, 120w DC Industrial motor with brake Cast Iron Gearbox Laser cut zinc plated steel chassis Simple set up

SPECIFICATIONS

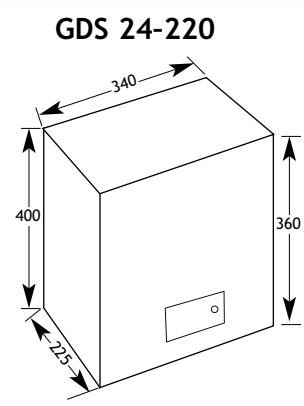

Powdercoated Steel Cover  
Wiring Details:-  
• Input power to Control Box  
240v AC or 24v AC or DC.

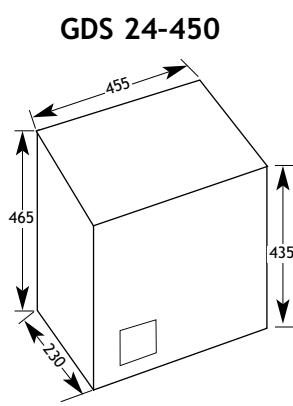

Powdercoated Steel Cover  
Wiring Details:-  
• Input power to Control Box  
240v AC or 24v AC or DC.



N14870

AUSTRALIAN MADE AND OWNED

Manufactured by:



gate drive systems australia

DISTRIBUTED BY:

Specifications subject to change without notice



gate drive systems australia





# 24v Sliding Gate Operators

Models GDS 24-220 and GDS 24-450