


E5 N

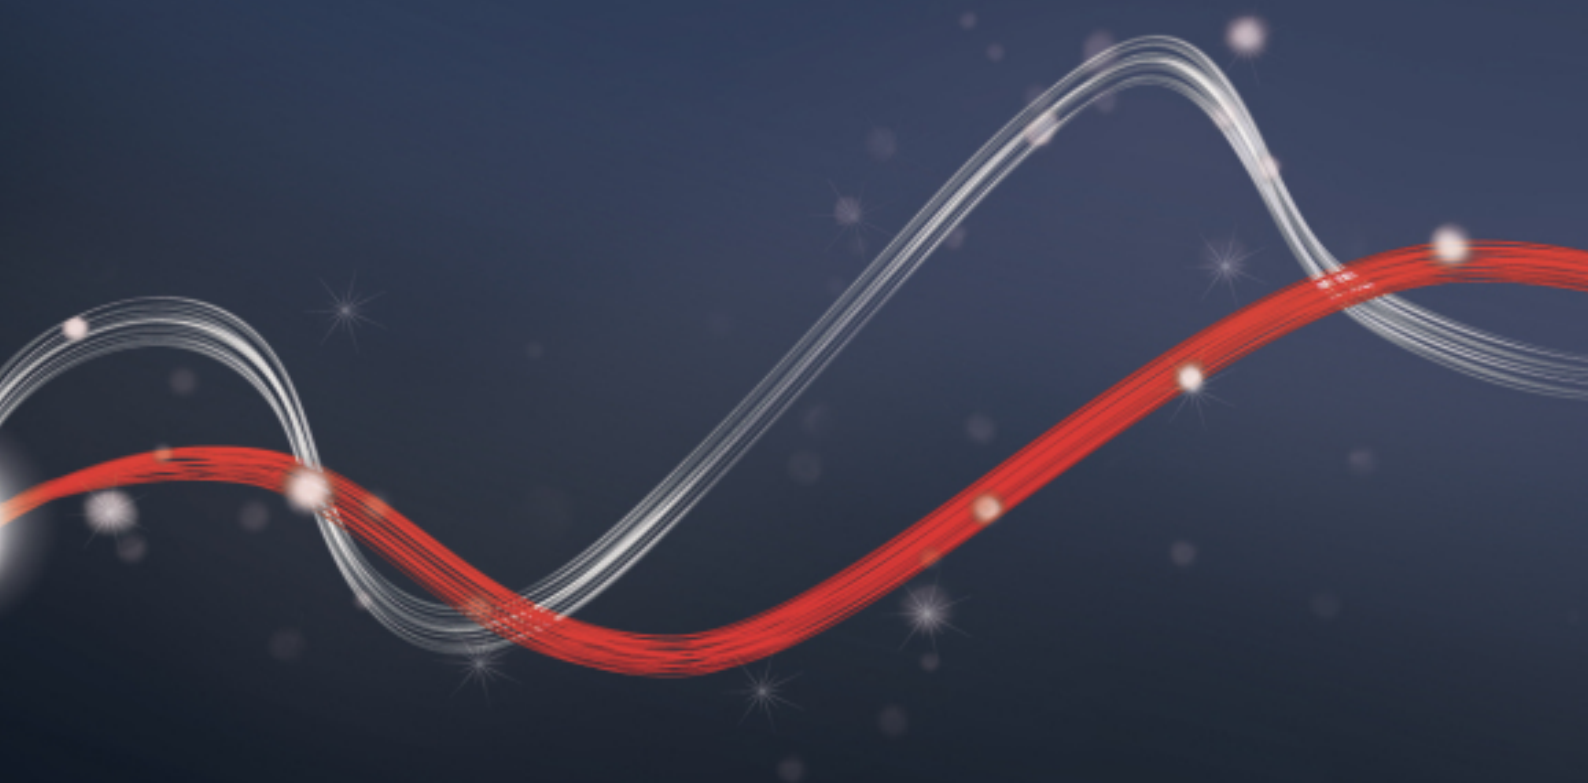

• Product

• PLUS

• CONTROL UNIT
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK



E5 N | | |

Code	Name	Description
P930003 00001	E5	Electromechanical operator 230 V for swing gates up to 200 kg in weight and 1.8 m in length.

· Product

· PLUS

· CONTROL UNIT
· TECHNICAL FEATURES

· ACCESSORIES

· DISCOVER U-LINK


PLUS



The design of the unit makes it ideal for use on small pillars or where there is very limited space.



Anti-crushing safety guaranteed by adjustable mechanical clutch.

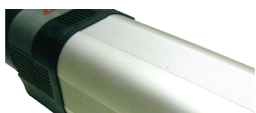

Aluminium structure with high-strength anodising treatment.



• Product

• PLUS

• **CONTROL UNIT**
• **TECHNICAL FEATURES**

• ACCESSORIES


• **DISCOVER U-LINK**

ALCOR N

**ALCOR N D113706 00002**

- Compatibility: ALCOR SD
- Application: control panel for one or two swing gate operators
- Board power supply: 230V single-phase
- Operators power supply: 230V single-phase 300W max each operator
- Main features: removable terminal blocks, settings controlled by potentiometers, fault signalling LEDs and incorporated dual channel receiver
- Main functions: stays locked when closed, 3/4 step logic, partial opening, separate opening/closing

	E5
Control unit	ALCOR N
Power supply	230 V
Power input	200 W
Maximum angle	130 °
Cycle time	22 sec
Type of limit switch	work time
Locking	solenoid lock
Release	reversible
Frequency of use	semi-intensive
Environmental conditions	from -10 °C to 60 °C
Protection rating	IP44
Operator weight	8 kg
Impact reaction	mechanical clutch
Operator type	electromechanical swing operators with articulated arm

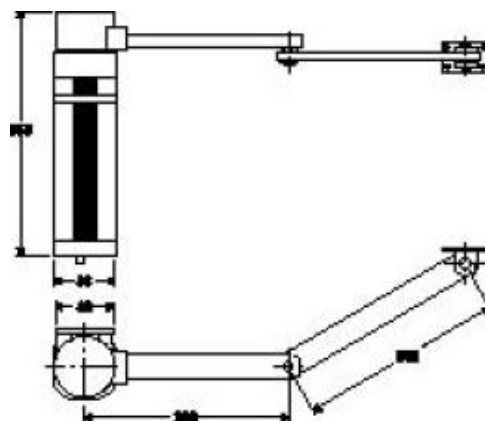




• Product

• PLUS

• CONTROL UNIT
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK

	Code	Name	Description
	D113680 00002	ALPHA SD	Quadro di comando universale a potenziometri per un operatore 230V/500W monofase
	D113693 00003	RIGEL 5	Quadro di comando a display universale per uno o due operatori da 230V - 600+600W
	N190104	BIR C	Rubber safety edge (H 30 mm), price per m
	P111052	CM1700	Mechanical safety edge, length 1.7 m
	P111053	CM2000	Mechanical safety edge, length 2 m
	P111401 00001	VENTIMIGLIA NS	Infrared device for BIR C or BAR C safety edges (conforms to EN 12978 Standard)
	D111013	ME	Control board for 12Vac solenoid lock for 230V automation systems
	P123001 00001	EBP	EBP 230Vac electric drop lock
	P123006 00001	EBPE 52	230Vac solenoid lock with zero stop resistance, also with release from outside for gates of max thickness 50 mm
	P123008 00001	EBPE 75	230Vac solenoid lock with zero stop resistance, also with release from outside for gates of max thickness 75 mm
	P123001 00013	EBP 24	24Vac solenoid lock, with 230/24V transformer installable in control panel
	N733008	BL E5	Slide lever (max leaf length 2 m, max leaf weight 200 kg) BSE 5
	N728011	BS E5	Slide lever (max leaf length 1.6 m, max leaf weight 100 kg) BSE 5
	D113748 00002	RADIUS B LTA 230 R1	Flashing light with incorporated antenna for motors with power supply 230 V.
	P123025	B 00 R02	Wall mounting for B LTA series flashing beacons
	P123026	B 00 R01	Metal guard for B LTA







• Product

• PLUS

• CONTROL UNIT
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK

	Code	Name	Description
	D111904	MITTO B RCB02 R1	Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A
	P121024	Q.BO TOUCH	Wireless digital touch button panel 433Mhz rolling code.
	P121022	Q.BO KEY WM	Key selector for outdoor use with double contact.
	P121023	Q.BO KEY WM AV	Vandalproof key selector with double contact, for outdoor use. Metal structure.
	P111526	DESME A15	Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc.
	P111528	THEA A15 O.PF	<div>new</div> Pair of orientable photocells with integrated flashing beacon Beam can be oriented 40° horizontally and 10° vertically. Synchronised infrared signal to avoid any possibility of accidental dazzling. Range 30 m. Power supply 24 V ac/dc. For external application.
	P903018	PHP	

· Product

· PLUS

· CONTROL UNIT
· TECHNICAL FEATURES

· ACCESSORIES

· DISCOVER U-LINK

What is U-Link?

The innovative technology that gives you new power

An exclusive Bft innovation: U-Link (Universal Link) is an exclusive Bft platform that allows the creation of technological ecosystems. In Home Automation Access, it allows communication with all the home access automation devices of any brand. So you save time and can control everything with ease, without any worries.

It is intuitive

Easy to install and use

It is scalable

Allows an unlimited number of devices to be added

It is flexible

Allows the creation of groups of interconnected products

It is practical

Works with or without a web connection

It is functional

Parameters can be controlled remotely via dedicated applications

• Product

• PLUS

• CONTROL UNIT
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK

All in one scheme: discover this amazing technology

A unique platform **allowing the creation of technological ecosystems** offering a wide range of solutions for different sectors.

Thanks to the B-Eba cards and the Clonix U-Link receiver, this proprietary platform featured by Bft products adapts to any protocol and access automation product (even non-Bft and old generation), and is used in various sectors.

Each device thus becomes smart and can be interconnected with other systems, thanks to a language that becomes universal.

U-Base 2



Software to install, easily and comfortably carry out maintenance and identify any malfunction of U-link compatible operators.

U-SDK



U-SDK is the innovative application that can make Bft automation systems compatible and easily integrated with a BMS network for the supervision of buildings.

Magistro



An innovative and easy to install system for easily managing all the home automation.

U-Control



U-Control is the application that helps the simple and quick integration of BFT automations in large building management systems.

Blue-Entry



Technology abreast of the times and attentive to daily needs: thanks to the use of U-link the house gate can now be opened with just your smartphone.



Clonix U-Link

Allows the connection of old-generation products or non-Bft products to U-Link systems.

Old-generation Bft operators or a product belonging to other brands: can they be connected to U-link? Yes, thanks to the Clonix receivers. Accessories that know no limits.




B-Eba

A direct line with your operators.

B-Eba expansion cards allow the connection of external devices, such as PCs, smartphones and tablets, to a Bft operator or Clonix receiver, or the connection of several Bft products in a U-Link network. These accessories integrate with U-Link technology and Bluetooth, Z-Wave, TCP/IP protocols, as well as the RS485 serial connection.

A device that fully translates what Bft intends as interconnectivity.

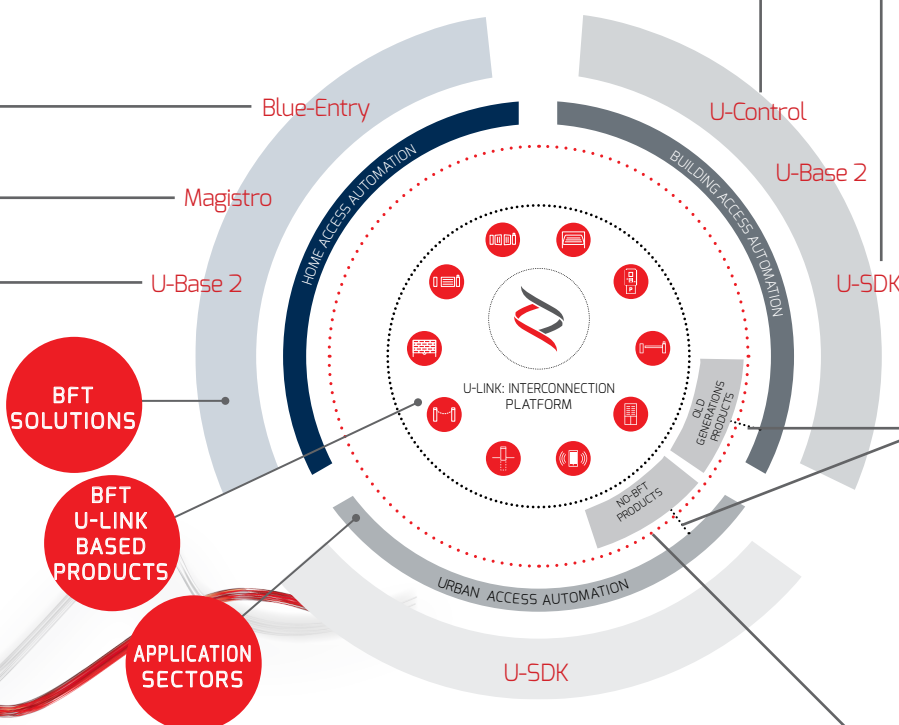



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.